

- (a) This exam measures ILOs no.: a.5 b.2 c.1 d7, and d9
- (b) No. of questions: 6. No. of pages: 12 (only pages no [9/12] and [12/12] is empty)
- (c) This is a close book exam. Only thermodynamics tables and calculator are permitted
- (d) Clear, systematic answers and solutions are required. In general, marks will not be assigned for answers and solutions that require unreasonable (in the opinion of the instructor) effort to decipher.
- (e) Retain all the significant figures of properties taken from tables. Final results should have at least 3 to 5 significant digits.
- (f) Ask for clarification if any question statement is not clear to you.
- (g) Solve all questions.
- (h) The exam will be marked out of 60. There are 30 marks bonus.

#### Question #1 (27 Marks)


# Choose the correct answer. Justify your answer with calculations or explanations or both whenever possible. If answer requires justification, marks will not be given to the correct answer without justification.

- 1. The latent heat of vaporization at critical point is (1 Mark)
  - (a) less than zero(b) greater than zero(c) equal to zero(d) none of the above.
- Select a correct statement of the first law if kinetic and potential energy changes are neglected. (1 Marks)
  - (A) Heat transfer equals the work done for a process.
  - (B) Net heat transfer equals the net work for a cycle.
  - (C) Net heat transfer minus net work equals internal energy change for a cycle.
  - (D) Heat transfer minus work equals internal energy for a process.
- A definite area or space where some thermodynamic processes takes place is known as Mark)
  - (a) thermodynamic system
- (b) thermodynamic cycle
- (c) thermodynamic process
- (d) thermodynamic law.
- 4. An open system is one in which (1 Mark)
  - (a) heat and work cross the boundary of the system, but the mass of the working substance does not
  - (b) mass of working substance crosses the boundary of the system but the heat and work do not
  - (c) both the heat and work as well as mass of the working substances cross the boundary of the system

- (d) neither the heat and work nor the mass of the working substances cross the boundary of the system.
- 5. An isolated system (0.5 Mark)
  - (a) is a specified region where transfer of energy and/or mass take place
  - (b) is a region of constant mass and only energy is allowed to cross the boundaries
  - (c) cannot transfer either energy or mass to or from the surroundings
  - (d) is one in which mass within the system is not necessarily constant

6. Which of the following is an intensive property of a thermodynamic system ? (0.5 Mark)

- (a) Volume (b) Temperature
- (c) Mass (d) Energy.
- 7. Which of the following is the extensive property of a thermodynamic system ? (0.5 Mark)(a) Pressure(b) Volume
  - (c) Temperature (d) Density.
- **8.** When two bodies are in thermal equilibrium with a third body they are also in thermal equilibrium with each other. This statement is called **(0.5 Marks)** 
  - (a) Zero law of thermodynamics
- (b) First law of thermodynamics
- (c) Second law of thermodynamics
- (d) Kelvin Planck's law.
- Select a correct statement of the first law if kinetic and potential energy changes are neglected. (1 Marks)
  - (A) Heat transfer equals the work done for a process.
  - (B) Net heat transfer equals the net work for a cycle.
  - (C) Net heat transfer minus net work equals internal energy change for a cycle.
  - (D) Heat transfer minus work equals internal energy for a process.
- 10. Absolute zero temperature is taken as (0.5 Mark)
  - (a) 273°C
  - (b) 273°C
  - (c) 237°C
  - (d) 373°C.
- 11. Which of the following is correct ? (0.5 Mark)
  - (a) Absolute pressure = gauge pressure + atmospheric pressure
  - (b) Gauge pressure = absolute pressure + atmospheric pressure
  - (c) Atmospheric pressure = absolute pressure + gauge pressure
  - (d) Absolute pressure = gauge pressure atmospheric pressure
- **12.**Calculate the pressure in the 140-mm-diameter cylinder shown. The spring is compressed 60 cm. Neglect friction. **(2 Marks)** 
  - (A) 140 kPa
  - (B) 135 kPa
  - (C) 100 kPa
  - (D) 35 kPa



13. The volume occupied by 4 kg of 200°C steam at a quality of 80 percent is nearest (1 Marks)

- (A) 0.004 m<sup>3</sup>
- (B**)** 0.104 m<sup>3</sup>
- (C) 0.4 m<sup>3</sup>
- (D) 4.1 m<sup>3</sup>

14. Saturated steam is heated in a rigid tank from 70 to 800°C. P<sub>2</sub> is nearest (2 Marks)

- (A) 100 kPa (B) 200 kPa (C) 300 kPa
- (D) 400 kPa

**15.** A vertical circular cylinder holds a height of 1 cm of liquid water and 100 cm of vapor. If *P* = 200 kPa, the quality is nearest **(1.5 Marks)** 

- (A) 0.01
- (B) 0.1
- (C) 0.4
- (D) 0.8

16. The point that connects the saturated-liquid line to the saturated-vapor line is called the (0.5 Marks)

- (A) triple point
- (B) critical point
- (C) superheated point
- (D) compressed liquid point

**17.**Air (R=0.287 kJ/kg.K) undergoes a three-process cycle. Find the net work done for 2 kg of air if the processes are **(4 Marks)** 

- $1 \rightarrow 2: constant-pressure expansion$
- $2 \rightarrow 3$ : constant volume
- $3 \rightarrow 1$ : constant-temperature compression

The necessary information is  $T_1 = 100^{\circ}$ C,  $T_2 = 600^{\circ}$ C, and  $P_1 = 200$  kPa.

- (A) 105 kJ
- (B) 96 kJ
- (C) 66 kJ
- (D) 11.5 kJ

**18.** Propane (C<sub>3</sub>H<sub>8</sub>) is an ideal gas is maintained at 6.39 MPa and 444 K. How much volume does 1 kg of this gas fill? **(1 Marks)** 

(a) 8.78 liters (c) 13.1 liters (b) 12.3 liters (d) 15.7 liters

- **19.**For each of the cases below, determine if the heat engine satisfies the first law (energy equation) and if it violates the second law. **(2 Marks)** 
  - a. $\dot{Q}_H = 6 \text{ kW}$  $\dot{Q}_L = 4 \text{ kW}$  $\dot{W} = 2 \text{ kW}$ b. $\dot{Q}_H = 6 \text{ kW}$  $\dot{Q}_L = 0 \text{ kW}$  $\dot{W} = 6 \text{ kW}$ c. $\dot{Q}_H = 6 \text{ kW}$  $\dot{Q}_L = 2 \text{ kW}$  $\dot{W} = 5 \text{ kW}$ d. $\dot{Q}_H = 6 \text{ kW}$  $\dot{Q}_L = 6 \text{ kW}$  $\dot{W} = 0 \text{ kW}$

	1 <sup>st</sup> Law	2 <sup>nd</sup> Law
a.		
b.		
C.		
d.		

- **20.** A heat pump is absorbing heat from the cold outdoors at 5 °C and supplying heat to a house at 25°C at a rate of 18,000 kJ/h. If the power consumed by the heat pump is 1.9 kW, the coefficient of performance of the heat pump is **(1 Marks)** 
  - (*a*) 1.3
  - (*b*) 2.6
  - (*c*) 3.0
  - (*d*) 3.8
  - (e) 13.9
- **21.** A heat engine cycle is executed with steam in the saturation dome. The pressure of steam is 1 MPa during heat addition and 0.4 MPa during heat rejection. The highest possible efficiency of this heat engine is **(2 Marks)** 
  - (a) 8.0%
    (b) 15.6%
    (c) 20.2%
    (d) 79.8%
    (e) 100%
- **22.** A heat engine receives heat from a source at 1000°C and rejects the waste heat to a sink at 50°C. If heat is supplied to this engine at a rate of 100 kJ/s, the maximum power this heat engine can produce is **(2 Marks)** 
  - (a) 25.4 kW (b) 55.4 kW (c) 74.6 kW (d) 95.0 kW (e) 100 kW

# Question #2 (14 Marks)

A closed system, containing 1.5 kg of helium (He), is initially at a pressure of  $P_1$ =120 kPa and a temperature of  $T_1$  =60°C, undergoes two quasi-equilibrium processes, one after the other. The first process (state 1 to state 2) is a polytropic compression until the pressure and temperature are  $P_2$ =500 kPa and  $T_2$ =150°C. The second process (state 2 to state 3) is an adiabatic expansion until the pressure and temperature are  $P_3$ =200 kPa and  $T_3$ =-10 °C

- a. Calculate the value of the polytropic exponent, *n*, for the first process (state 1 to state 2). **(4 Marks)**
- b. Calculate the work done by the system in the first process,  $W_{12}$  in kJ. (2 Marks)
- c. Calculate the heat transfer by the system in the first process,  $Q_{12}$  in kJ. (2 Marks)
- d. Calculate the work done by the system in the second process,  $W_{23}$  in kJ. (2 Marks)
- e. Show the two processes on a P-V (pressure-volume) diagram. Clearly identify the states and show the processes paths with respect to constant temperature lies. **(4 Marks)**

(N.B. use the following constants for helium, R = 2.0785 kJ/kg.K,  $C_{vo}=3.1156 \text{ kJ/kg.K}$ )

#### <u>Solution</u>

# Question #3 (6 Marks)


A balloon behaves such that the pressure inside is proportional to its diameter squared. It contains 2kg of R-134a 5°C, 60% quality. The balloon and refrigerant R-143a are now heated so that a final pressure of 600 kPa is reached. Find the amount of work done in the process and also amount of heat transfer

**Solution** 

## Question #4 (10 Marks)

A portion of the steam passing through a steam turbine is sometimes removed for the purposes of feedwater heating as shown in figure . Consider an adiabatic steam turbine with 12.5 MPa and 550C steam entering at a rate of 20 kg/s. Steam is bled from this turbine at 1000 kPa and 200C with a mass flow rate of 1 kg/s. The remaining steam leaves the turbine at 100 kPa and 100C. Determine the power produced by this turbine.

#### <u>Solution</u>

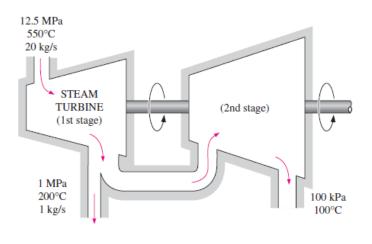

# Question #5 (22 Marks)

Two springs with different spring constants (K, 2K) are installed in a piton/cylinder arrangement with outside air at 100 kPa. The cylinder (shown in Figure 3) contains 1 kg of water initially at 110 °C and a quality of 15% (state 1). Heat is added to the cylinder until the pressure and temperature inside the cylinder are 1 MPa and 1300 C (state 4), respectively. If the piston comes in contact with the first spring with a constant of *K* when the volume of the cylinder equals =0.25 m<sup>3</sup> (state 2) and with the second spring of a constant of 2K when the volume of the cylinder is doubled (state 3). Calculate

- a. Mass of piston if its cross sectional area is 500 cm<sup>2</sup>. (3 Marks)
- b. Springs constant. (7 Marks)
- c. Pressure at which piston comes in contact with the second spring, P<sub>3</sub>. (1 Marks)
- d. Work done by water in each process and net work. (4 Marks)
- e. Heat transfer to the cylinder. (3 Marks)

With our best wishes

f. Draw a *P-V* diagram showing the state points and process path(s). label the values of P and V for each state point and clarify label the constant temperature lines that passes through the state points. **(4 Marks)** 




Figure 3 Sketch of problem in question #5


#### <u>Solution</u>

[9/12]

## Question #6 (11 Marks)

A reversible (Carnot) heat engine operates between two thermal reservoirs at 500 °C and 25°C. The heat engine is used to drive an irreversible heat pump that removes heat from a low temperature reservoir at  $T_{L,1}=0$ °C and rejects heat to a high temperature reservoir at  $T_{H,1} = 45$ °C. It is desired to provide input power,  $\dot{W}_1$ , to the heat pump such that the coefficient of performance of the irreversible heat pump is 60% of that for a reversible heat pump; *i.e.*,  $\text{COP}_{\text{HP}} = 0.6(\text{COP}_{\text{HP,rev}})$ . The total power developed by the heat engine is divided into two parts: an amount  $\dot{W}_1$  that is used to drive the heat pump, and  $\dot{W}_{2,\text{net}}$  as the remaining power, where  $\dot{W}_{2,\text{net}} = 50$  kW. Heat is transferred to the heat engine from a high temperature reservoir at the rate of  $\dot{Q}_{H,2}$ , and heat is "pumped" by the heat pump to a high temperature reservoir at the rate of  $\dot{Q}_{H,1}$ . It is known that the sum of these two rates of heat transfer is as follows:  $\dot{Q}_{H,1} + \dot{Q}_{H,2} = 500$  kW

- (a) Determine the thermal efficiency,  $\eta_{th}$ , for the Heat Engine and then coefficient of performance COP<sub>HP</sub>, for the Heat Pump. **(3 Marks)**
- (b) Determine the power input required for the Heat Pump,  $\dot{W}_1$ , in kW. (4 Marks)
- (c) Determine the rates of heat transfer  $\dot{Q}_{\rm H,1}$  and  $\dot{Q}_{\rm L,1}$  for the Heat Pump, and determine the rates of heat transfer  $\dot{Q}_{\rm H,2}$  and  $\dot{Q}_{\rm L,2}$  for the Heat Engine. **(4 Marks)**

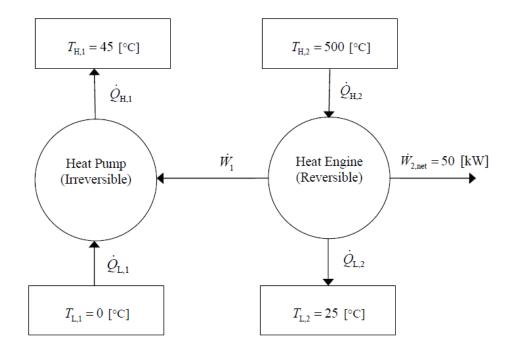

**Solution**